




MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	% EFF
UM3101	24 VDC	5 VDC	20 A	80
UM3108	24 VDC	2.5 VDC	20 A	73
UM3109	24 VDC	3.3 VDC	20 A	75
UM3111	48 VDC	5 VDC	20 A	82
UM3112	48 VDC	12 VDC	8.33 A	85
UM3118	48 VDC	2.5 VDC	20 A	74
UM3119	48 VDC	3.3 VDC	20 A	76

NOTE: Other output voltage can be supported upon request.

MODEL NUMBER	UM3101 UM3111	UM3112	UM3108 UM3118	UM3109 UM3119
MAXIMUM <sup>6</sup> CAPACITIVE LOAD (uF)	2200	1000	2200	2200

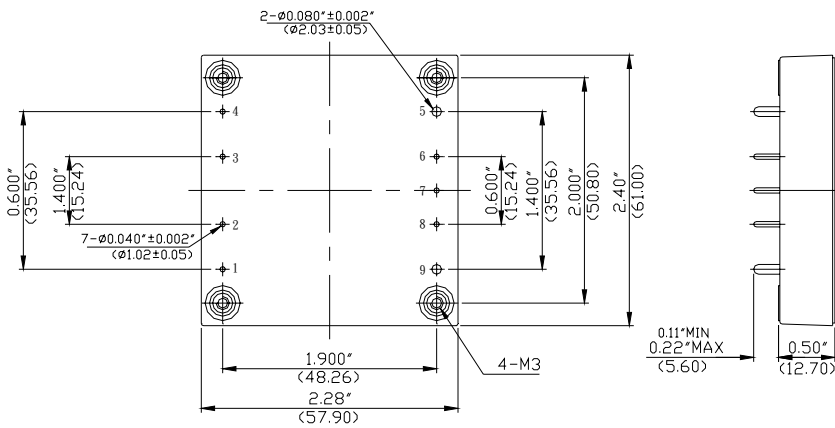

All dimensions in inches(mm)  
Tolerance .xx =±0.04  
.xxx =±0.010

Pin Connections*	
Pin	Function
1	+Vin
2	On/Off
3	CASE
4	-Vin
5	-Vout
6	-Sense
7	Trim
8	+Sense
9	+Vout

NOTE:

\* : If remote sensing not utilized, output sense pin must be jumpered to respective output power pins, for normal operation connect Pin NO.5 to Pin NO.6 and Pin NO.8 to Pin NO.9.



**UMEC  
INTERNATIONAL**

2539 W. 237TH STREET, SUITE A,  
TORRANCE, CA 90505  
TEL: (310) 326-7072 FAX: (310) 326-7058