




MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	% EFF
UM3211	48 VDC	5 VDC	40 A	80

NOTE: Other output voltage can be supported upon request.

MODEL NUMBER	UM3211
MAXIMUM <sup>5</sup> CAPACITIVE LOAD (uF)	2200

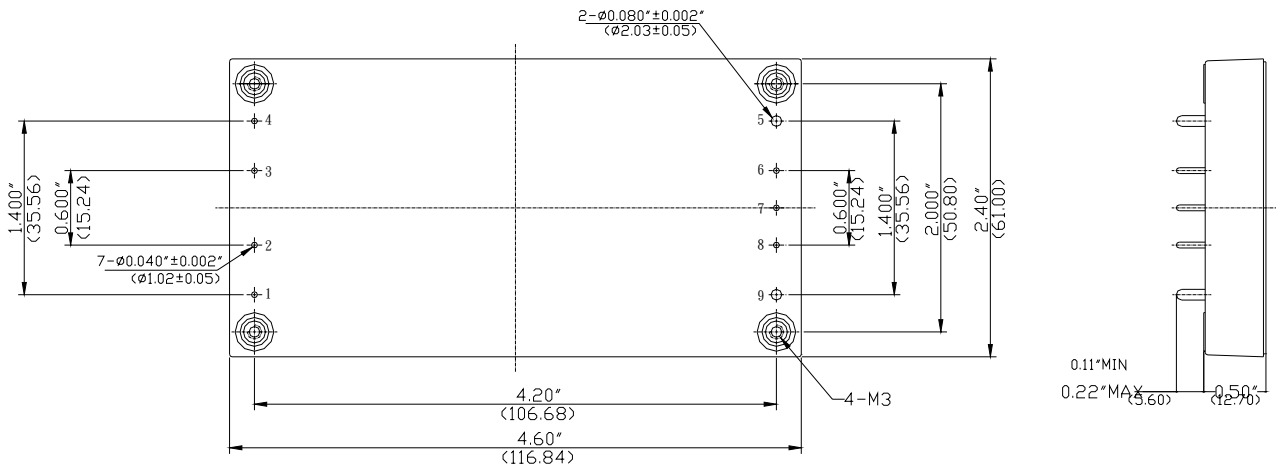

All dimensions in inches(mm)  
Tolerance .xx =±0.04  
.xxx =±0.010

Pin Connections <sup>1</sup>	
Pin	Function
1	+Vin
2	On/Off
3	N/A
4	-Vin
5	-Vout
6	-Sense
7	Trim
8	+Sense
9	+Vout

NOTE:

1. If remote sensing not utilized, output sense pin must be jumpered to respective output power pins, for normal operation connect Pin NO.5 to Pin NO.6 and Pin NO.8 to Pin NO.9.



**UMEC  
INTERNATIONAL**

2539 W. 237TH STREET, SUITE A,  
TORRANCE, CA 90505  
TEL: (310) 326-7072 FAX: (310) 326-7058