


MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	% EFF
UM3211	48 VDC	5 VDC	40 A	80

NOTE: Other output voltage can be supported upon request.

MODEL NUMBER	UM3211
MAXIMUM ⁵ CAPACITIVE LOAD (uF)	2200

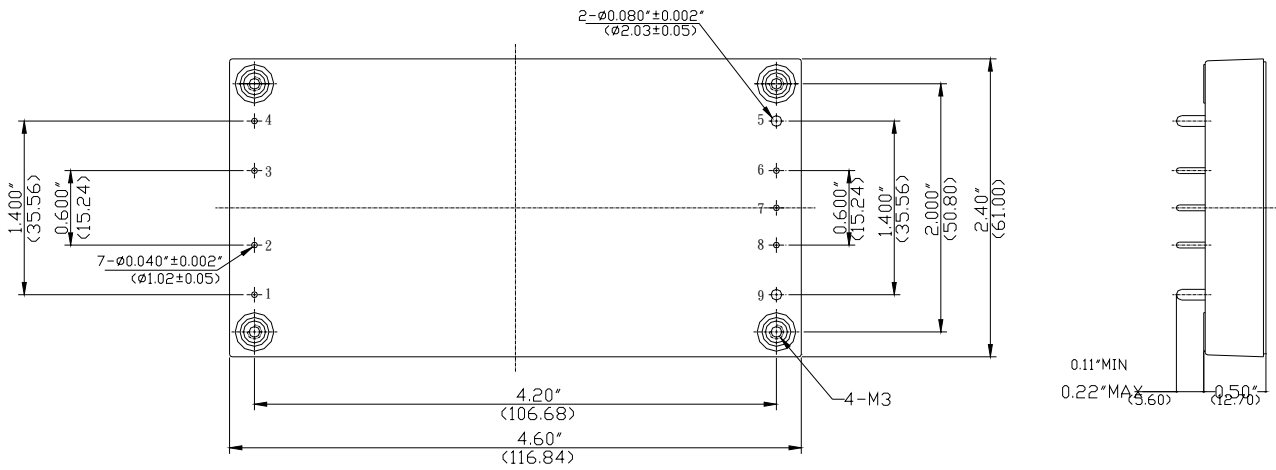

All dimensions in inches(mm)
Tolerance .xx = ± 0.04
.xxx = ± 0.010

Pin Connections ¹	
Pin	Function
1	+Vin
2	On/Off
3	N/A
4	-Vin
5	-Vout
6	-Sense
7	Trim
8	+Sense
9	+Vout

NOTE:

1. If remote sensing not utilized, output sense pin must be jumpered to respective output power pins, for normal operation connect Pin NO.5 to Pin NO.6 and Pin NO.8 to Pin NO.9.



**UMEC
INTERNATIONAL**

2539 W. 237TH STREET, SUITE A,
TORRANCE, CA 90505
TEL: (310) 326-7072 FAX: (310) 326-7058