


MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE & RATED CURRENT ⁷	
		Vo1	Vo2
UM3801	24 VDC	5V/15A	3.3V/15A
UM3811	48 VDC	5V/15A	3.3V/15A

NOTE: Other output voltage can be supported upon request.

MODEL NUMBER	UM3801		UM3811	
	Vo1	Vo2	Vo1	Vo2
MAXIMUM ⁸ CAPACITIVE LOAD (uF)	1000	1000	1000	1000

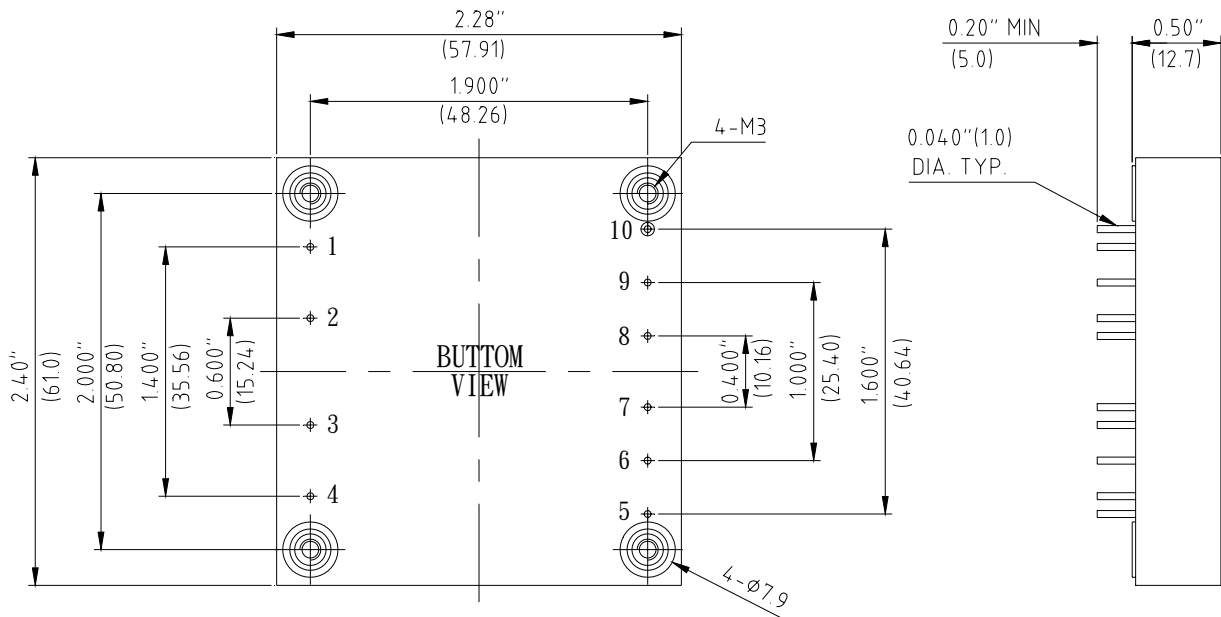

Pin Connections	
Pin	Function
1	-Vin
2	CASE
3	On/Off
4	+Vin
5	Vo1 Trim
6	Vo1 Return
7	Vo1
8	Vo2 Trim
9	Vo2 Return
10	Vo2

All dimensions in inches (mm)
Tolerance .xx = ±0.04"
.xxx = ±0.010"



**UMEC
INTERNATIONAL**

2539 W. 237TH STREET, SUITE A,
TORRANCE, CA 90505
TEL: (310) 326-7072 FAX: (310) 326-7058