





MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE & RATED CURRENT <sup>7</sup>		OVP	
		Vo1	Vo2	Vo1	Vo2
UM5021	48 VDC	5V/20A	3.3V/20A	6.2 V	4.3 V


NOTE: Other output voltage can be supported upon request.

MODEL NUMBER	UM5021	
	Vo1	Vo2
MAXIMUM <sup>8</sup> CAPACITIVE LOAD (uF)	1000	1000

### OUTLINE DIMENSIONS

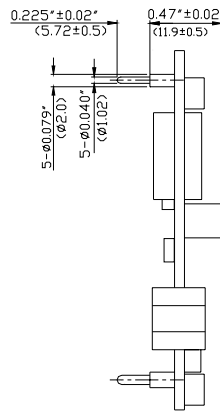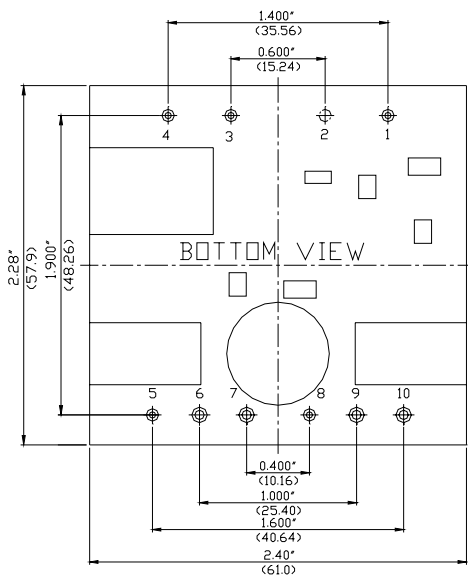

Pin Connections	
Pin	Function
1	-Vin
2	No Pin
3	On/Off
4	+Vin
5	Vo1 Trim
6	Vo1 Return
7	Vo1
8	Vo2 Trim
9	Vo2 Return
10	Vo2

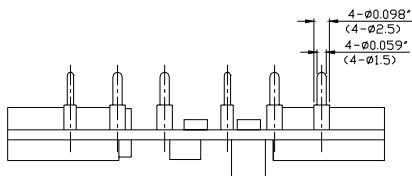

All dimensions in inches (mm)  
Tolerance .xx = ±0.04"  
.xxx = ±0.010"



**UMEC  
INTERNATIONAL**

UM5000

2539 W. 237TH STREET, SUITE A,  
TORRANCE, CA 90505  
TEL: (310) 326-7072 FAX: (310) 326-7058

2 of 2

REV.2