


MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT FULL LOAD	TYPICAL EFFICIENCY	MAXIMUM ⁹ CAPACITRE LOAD(μF)
UM5611	48 VDC	2.0 VDC	30 A	1453 mA	86%	10000
UM5612	48 VDC	3.3 VDC	30 A	2317 mA	89%	10000
UM5613	48 VDC	5 VDC	30 A	3434 mA	91%	10000
UM5614	48 VDC	12 VDC	12.5 A	3491 mA	89.5%	4400

NOTE: Other output voltage can be supported upon request.

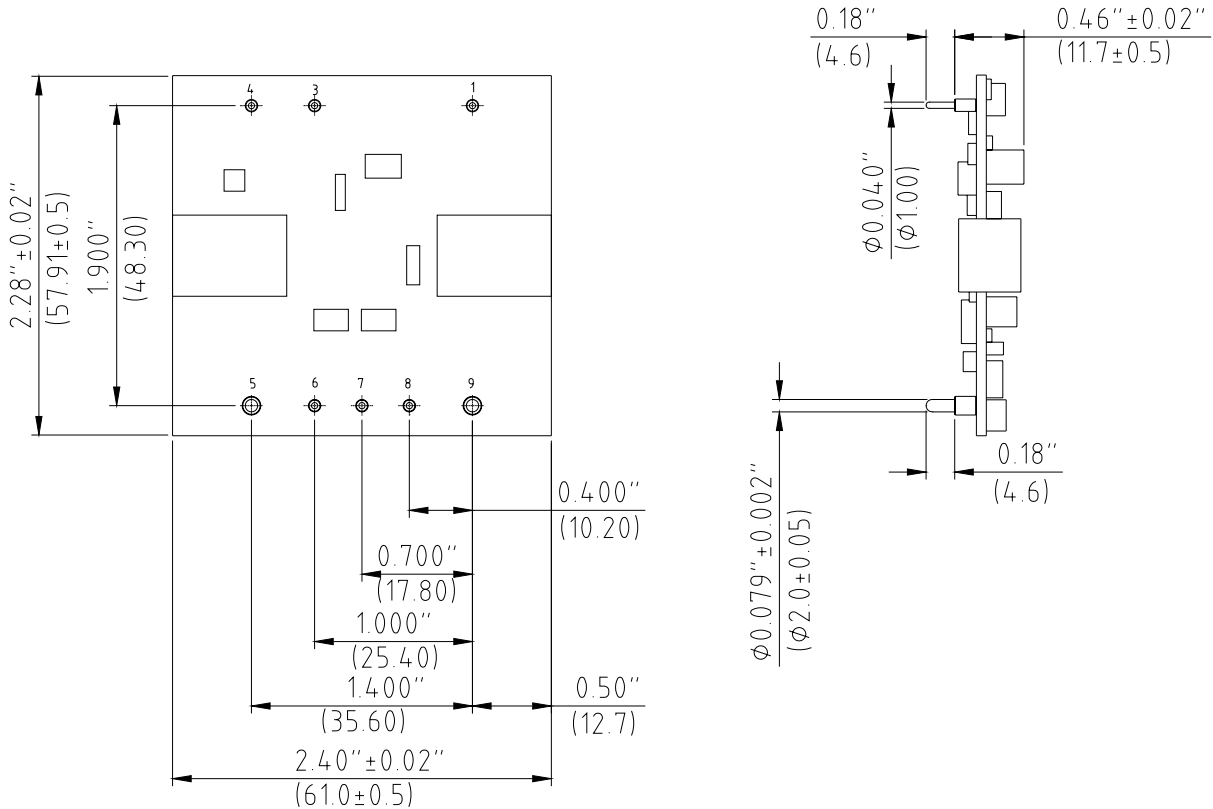

Pin Connections	
Pin	Function
1	-Vin
2	No Pin
3	Remote On/Off Control
4	+Vin
5	+Vout
6	+Vsense
7	Trim
8	-Vsense
9	-Vout

All dimensions in inches(mm)
Tolerance .xx = ±0.04"
.xxx = ±0.010"

NOTE:
If remote sensing not utilized, output sense pin must be jumpered to respective output power pins, for normal operation connect Pin NO.5 to Pin NO.6 and Pin NO.8 to Pin NO.9.



**UMEC
INTERNATIONAL**

2539 W. 237TH STREET, SUITE A,
TORRANCE, CA 90505
TEL: (310) 326-7072 FAX: (310) 326-7058