




MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		% EFF (typ)	MAXIMUM CAPACITIVE LOAD (uF)	CASE
				NO LOAD	FULL LOAD			
UM5701	9-18 VDC	5 VDC	6000 mA	60 mA	2977 mA	84	6000	J
UM5702		12 VDC	2500 mA	60 mA	2840 mA	88	2200	
UM5703		15 VDC	2000 mA	60 mA	2840 mA	88	1000	
UM5704		±5 VDC	3000 mA	60 mA	2977 mA	84	2200	
UM5705		±12 VDC	1250 mA	60 mA	2840 mA	88	1000	
UM5706		±15 VDC	1000 mA	60 mA	2840 mA	88	1000	
UM5707		1.8 VDC	6000 mA	60 mA	1125 mA	80	3300	
UM5708		2.5 VDC	6000 mA	60 mA	1543 mA	81	3300	
UM5709		3.3 VDC	7500 mA	60 mA	2547 mA	81	3300	
UM5711	18-36 VDC	5 VDC	6000 mA	60 mA	1437 mA	87	3300	J
UM5712		12 VDC	2500 mA	60 mA	1405 mA	89	2200	
UM5713		15 VDC	2000 mA	60 mA	1405 mA	89	1000	
UM5714		±5 VDC	3000 mA	60 mA	1437 mA	87	2200	
UM5715		±12 VDC	1250 mA	60 mA	1405 mA	89	1000	
UM5716		±15 VDC	1000 mA	60 mA	1405 mA	89	1000	
UM5717		1.8 VDC	6000 mA	60 mA	555 mA	81	3300	
UM5718		2.5 VDC	6000 mA	60 mA	753 mA	83	3300	
UM5719		3.3 VDC	7500 mA	60 mA	1200 mA	86	3300	
UM5721	36-75 VDC	5 VDC	6000 Ma	40 mA	710 mA	88	3300	J
UM5722		12 VDC	2500 mA	40 mA	702 mA	89	2200	
UM5723		15 VDC	2000 mA	40 mA	702 mA	89	1000	
UM5724		±5 VDC	3000 mA	40 mA	710 mA	88	2200	
UM5725		±12 VDC	1250 mA	40 mA	702 mA	89	1000	
UM5726		±15 VDC	1000 mA	40 mA	702 mA	89	1000	
UM5727		1.8 VDC	6000 mA	40 mA	271 mA	83	3300	
UM5728		2.5 VDC	6000 mA	40 mA	367 mA	85	3300	
UM5729		3.3 VDC	7500 mA	40 mA	586 mA	88	3300	
UM5731	18-75 VDC	5 VDC	6000 Ma	60 mA	720 mA	87	3300	J
UM5732		12 VDC	2500 mA	60 mA	710 mA	88	2200	
UM5733		15 VDC	2000 mA	60 mA	710 mA	88	1000	
UM5734		±5 VDC	3000 mA	60 mA	720 mA	87	2200	
UM5735		±12 VDC	1250 mA	60 mA	710 mA	88	1000	
UM5736		±15 VDC	1000 mA	60 mA	710 mA	88	1000	
UM5737		1.8 VDC	6000 mA	60 mA	274 mA	82	3300	
UM5738		2.5 VDC	6000 mA	60 mA	372 mA	84	3300	
UM5739		3.3 VDC	7500 mA	60 mA	480 mA	86	3300	

NOTE: Other output voltage can be supported upon request.


### CASE DIMENSIONS AND PIN CONFIGURATION

#### CASE J

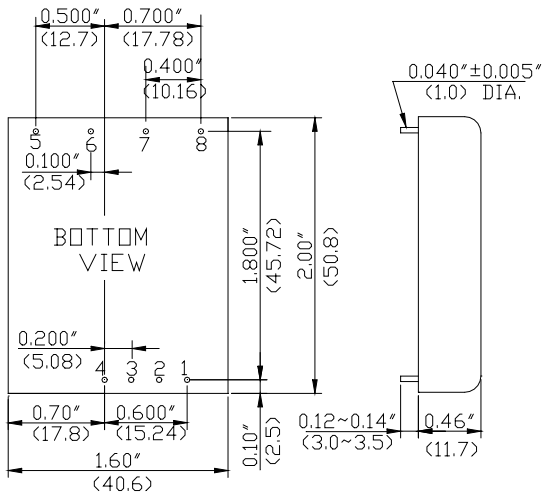

All Dimensions in Inches (mm).  
 Tolerance .xx = ±0.04"  
 .xxx = ±0.010"

PIN CONNECTIONS	
Pin Number	Pin Function
1	Remote Control
2	No Pin
3	- Input
4	+ Input
5	No Pin
6	+ Output
7	- Output
8	Trim

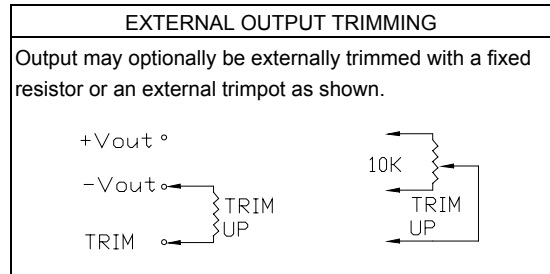

**UMEC  
INTERNATIONAL**

2539 W. 237TH STREET, SUITE A,  
 TORRANCE, CA 90505  
 TEL: (310) 326-7072 FAX: (310) 326-7058