


UMEC International Corporation

UM2100 SERIES

2 Watt DC-DC Converters

- ◆ 24-Pin Dip Package
- ◆ High Efficiency (up to 80%)
- ◆ Regulated Outputs
- ◆ Pi Input Filter
- ◆ 3000 VDC Isolation
- ◆ Continuous Short Circuit Protection
- ◆ Conductive EMI Meets CISPR22 Class A

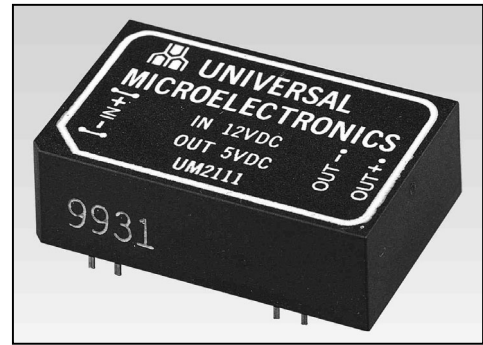

SPECIFICATIONS

All specifications are typical at nominal line full load, and 25°C unless otherwise noted.

INPUT SPECIFICATIONS

Input Voltage Range	5V	4.5-5.5V
	12V	9-18V
	24V	18-36V
	48V	36-72V
Input Filter	Pi Network	

OUTPUT SPECIFICATIONS

Voltage Accuracy	±2.0% max.
Voltage Balance (Dual) ¹	±2.0% max.
Ripple and Noise, 20MHz BW	60mV P-P max.
Temperature Coefficient	±0.05%/°C
Short Circuit Protection	Continuous
Line Regulation ²	±0.5%
Load Regulation ³	±0.5%

GENERAL SPECIFICATIONS

Efficiency	See Table
Isolation Voltage	3000 VDC min.
Isolation Resistance	10 ⁸ ohms min.
Switching Frequency	150KHz-850KHz (Depending on Loading)
Operating Temperature Range	
Ambient, None Derating	-25°C to +71°C
Cooling	Free Air Convection
Storage Temperature Range	-40°C to +100°C
Humidity	95% R.H. max.
Dimensions CASE A	1.25*0.8*0.4 inches (31.8*20.3*10.2 mm)
Case Material	
Standard Models	Non-Conductive Black Plastic UL94V-0
Weight	15g

NOTES

1. For common output models.
2. Measured from high line to low line.
3. Measured from full load to 10% load.




UMEC International Corporation
2539 West 237th Street, Suite A
Torrance, California 90505 USA

www.umecintl.com
Tel: 310-326-7072
Fax: 310-326-7058

UMEC International Corporation

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		CASE	EFFICIENCY
				NO LOAD	FULL LOAD		
UM2101	5 VDC	5 VDC	400 mA	110 mA	635 mA	A	63%
UM2102		12 VDC	160 mA	100 mA	550 mA		70%
UM2103		15 VDC	130 mA	110 mA	570 mA		68%
UM2104		± 5 VDC	±200 mA	115 mA	665 mA		60%
UM2105		±12 VDC	±80 mA	130 mA	640 mA		60%
UM2106		±15 VDC	±65 mA	140 mA	640 mA		60%
UM2107		9 VDC	250 mA	105 mA	680 mA		66%
UM2111	12 VDC	5 VDC	400 mA	50 mA	230 mA	A	72%
UM2112		12 VDC	160 mA	50 mA	215 mA		75%
UM2113		15 VDC	130 mA	50 mA	215 mA		75%
UM2114		± 5 VDC	±200 mA	65 mA	250 mA		67%
UM2115		±12 VDC	±80 mA	70 mA	245 mA		65%
UM2116		±15 VDC	±65 mA	80 mA	240 mA		67%
UM2117		9 VDC	250 mA	50 mA	250 mA		75%
UM2121	24 VDC	5 VDC	400 mA	30 mA	115 mA	A	73%
UM2122		12 VDC	160 mA	30 mA	105 mA		78%
UM2123		15 VDC	130 mA	30 mA	105 mA		78%
UM2124		± 5 VDC	±200 mA	35 mA	135 mA		72%
UM2125		±12 VDC	±80 mA	35 mA	115 mA		70%
UM2126		±15 VDC	±65 mA	35 mA	115 mA		70%
UM2127		9 VDC	250 mA	30 mA	120 mA		78%
UM2131	48 VDC	5 VDC	400 mA	5 mA	55 mA	A	75%
UM2132		12 VDC	160 mA	10 mA	50 mA		80%
UM2133		15 VDC	130 mA	10 mA	50 mA		80%
UM2134		±5 VDC	±200 mA	15 mA	57 mA		73%
UM2135		±12 VDC	±80 mA	15 mA	57 mA		70%
UM2136		±15 VDC	±65 mA	15 mA	56 mA		72%

CASE A

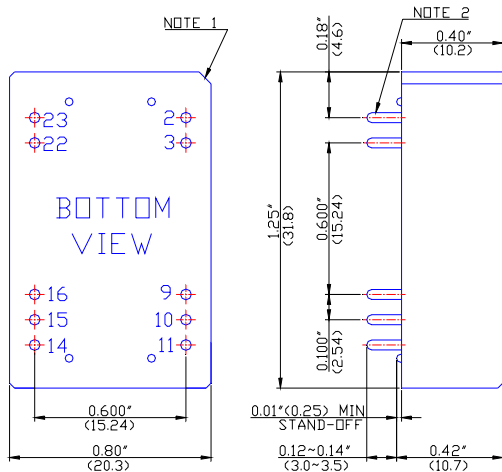

All dimensions in inches(mm)

Note 1: Cut-corner marking for Pin No. 1

Note 2: Pin size is 0.020±0.005 inches (0.5 mm) dia. or 0.020*0.012 inch

Note 3: Tolerance .xx = ±0.04"
.xxx = ±0.010"

PIN CONNECTIONS			
Pin	Single Output	Dual Output Common ¹	Dual Output Separated ²
2	-V Input	-V Input	-V Input
3	-V Input	-V Input	-V Input
9	NC*	Common	+V2 Output
10	NC*	NC*	NC*
11	NC*	-V Output	-V2 Output
14	+V Output	+V Output	+V1 Output
15	NC*	NC*	NC*
16	-V Output	Common	-V1 Output
22	+ V Input	+ V Input	+ V Input
23	+ V Input	+ V Input	+ V Input

*NC(No Connection)

NOTES: 1. ±5V output models with common output with separated output, suffix a "S" to the Model number.

±12V, 15V output models with separated output with common output, suffix a "C" to the model number.



UMEC International Corporation
2539 West 237th Street, Suite A
Torrance, California 90505 USA

www.umecintl.com
Tel: 310-326-7072
Fax: 310-326-7058