

UMEC International Corporation

UM6300 SERIES



30 Watt DC-DC Converters

- ◆ Input Voltage Range: 3.0V-5.5V/9.6V-14.4V
- ◆ Output Voltage Adjustable with the Trim Function
- ◆ Non-Isolated POL Converter
- ◆ Ultra High Efficiency, Up to 94% Full Load, 95% Half
- ◆ Open-Frame
- ◆ Output Overcurrent Protection with Auto-restart
- ◆ Remote on/off Control
- ◆ RoHS Compliant



SPECIFICATIONS

All specifications are typical at nominal line, nominal output voltage, full load and 25°C unless otherwise noted.

INPUT SPECIFICATIONS

Input Voltage Range¹, 5V 3-5.5V
 12V 9.6-14.4V
 Input External Bypass Capacitance² 100uF

OUTPUT SPECIFICATIONS

Voltage Accuracy³ ±2%max.
 Transient Response⁴, Single, 25% step Load Change,
 ±1% Error Band, 5V <50u sec.
 12V <100u sec.
 Ultra Wide Trim Adj. Range¹¹, 5V 0.8 – 3.63V
 12V 0.8 – 5.0V
 Line Regulation⁵ ±0.5% max.
 Load Regulation⁶ ±1.5% max.
 Ripple and Noise, 20MHz BW⁷, 5V 50mV p-p max.
 12V 60mV p-p max.
 25mVrms max.

GENERAL SPECIFICATIONS

Efficiency See Table
 Switch Frequency, 5V, 12V 300KHz typ.
 Operation Temperature⁸ -40°C to +100°C
 Storage Temperature Range -40°C to +125°C
 Dimensions 0.8*0.85*0.31 inches
 (20.2*21.5*7.8 mm)
 Weight 4.5g

APPLICATIONS

Distributed Power Architecture (DPA)
 Intermediate Bus Architecture (IBA)
 Telecommunication Equipment
 Datacommunication Equipment
 Servers and Workstations
 Latest Generation IC's (DSP, ASIC, FPGA) and
 Microprocessor Powered Applications
 LANs/WANs Applications



UMEC International Corporation
 2539 West 237th Street, Suite A
 Torrance, California 90505 USA

NOTE

1. When Vo= 3.3V, then Vin range from 4.5V to 5.5V.
 When Vo≤ 2.5V, then Vin range from 3V to 5.5V.
2. Recommended customer added capacitance.
3. Defined at the static output regulation at 25°C, including initial setting accuracy, Line voltage within stated limits and load current within stated limits.
4. di/dt= 0.1A/1uS, Tc= 25°C; load change= 0.5 Io max. to 0.75 Io max. and 0.75 Io max. to 0.5 Io max.
5. Measured from high line to low line.
6. Measured from full load to 1/10 load.
7. Measured with 100uF low ESR tantalum capacitor and 1uF ceramic capacitor across output.
8. Full operating temperature range is -40°C to 100°C ambient temperature with appropriate power derating.
9. Standard product is active high, active low remote ON/OFF option is available, to order suffix a "N" to the model number e.g. UM6301-VN.
10. The nominal output voltage of UM6301 and UM6311 is 3.3V and 5.0V respectively.
11. The TRIM input permits the user to adjust the output voltage according to the trim range specification by using an external resistor R_{trim} connecting to the ground. By using a 1% tolerance trim resistor, set point tolerance of 2% is achieved as specified in the datasheet.

EXTERNAL OUTPUT TRIMMING			
UM6301		UM6311	
V _{o,des} (V)	R _{trim} (KΩ)	V _{o,des} (V)	R _{trim} (KΩ)
0.8	Open	0.8	Open
1.2	23.93	1.2	58.01
1.5	11.93	1.5	31.01
1.8	7.17	1.8	20.01
2.5	2.63	2.5	9.91
3.3	0.56	3.3	5.11
		5.0	1.00

REMOTE ON/OFF CONTROL	
Logic Compatibility.....	CMOS or Open Collector TTL
Ec-ON	> +2.5 VDC or Open Circuit
Ec-OFF	< 0.8 VDC
Control Common	Referenced to Input Minus



www.umecintl.com
 Tel: 310-326-7072
 Fax: 310-326-7058

UMEC International Corporation

MODEL NUMBER	INPUT VOLTAGE (VDC)	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT RATED LOAD (Amps)	INPUT CURRENT FULL LOAD (mA)	TYPICAL EFFICIENCY (%)
UM6301	5	0.8 – 3.63	6	4640	94
UM6311	12	0.8 – 5.0	6	2660	94

NOTE: Without an external resistor between the trim pin and the ground, the output voltage of the module is 0.8 Vdc.

PART NUMBER STRUCTURE

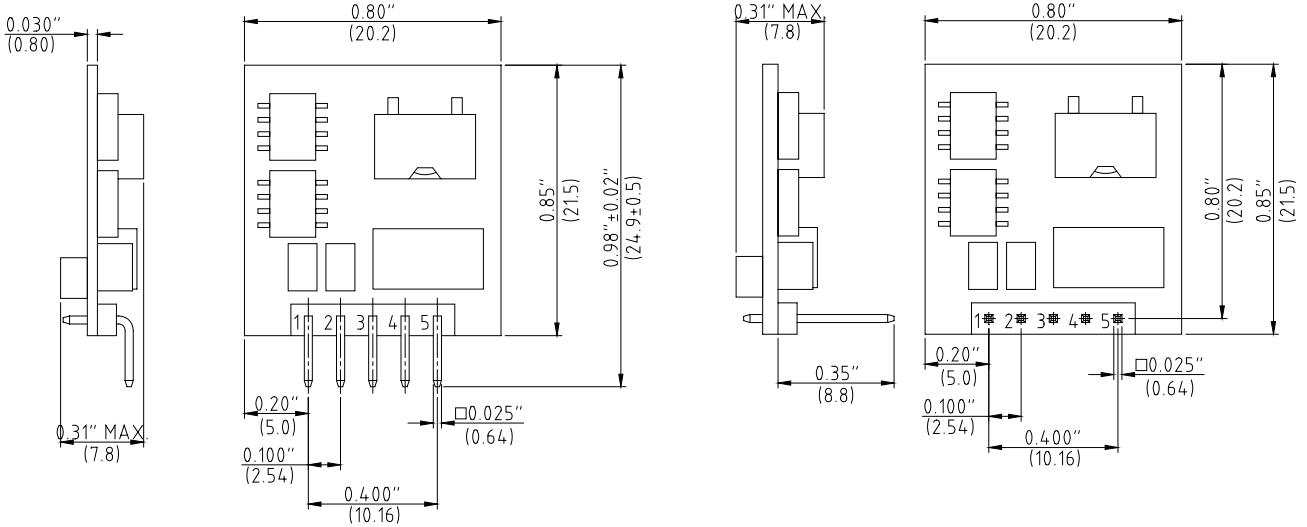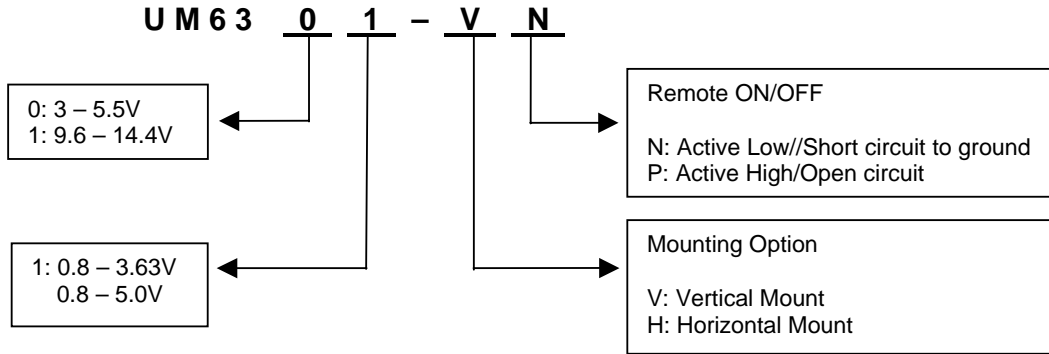

Vertical Mount-V
(Standard)

Horizontal Mount-H

Pin Connections	
Pin	Function
1	Remote ON/OFF
2	+Vin
3	Ground / -Vo / -Vin
4	+Vout
5	Trim

All dimensions in inches (mm)
Tolerance .xx = ±0.04"
.xxx = ±0.010"



UMEC International Corporation
2539 West 237th Street, Suite A
Torrance, California 90505 USA

www.umecintl.com
Tel: 310-326-7072
Fax: 310-326-7058